



BRACKET AND POWER
CONNECTOR FOR PIONEER
FLOOD LIGHT SHALL BE
MOUNTED ON EACH SIDE.

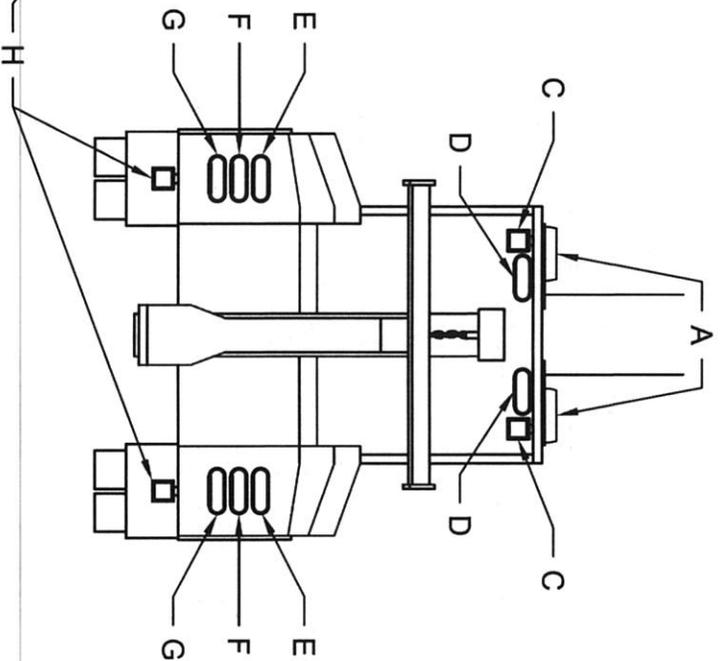

LIGHTING NOTES:

- A. TWO (2) R-10 LIGHT BARS MOUNTED TO THE ARROW BOARD BRACKET.
- B. TWO (2) LINZ 6 WARNING LIGHTS. ONE ON EACH SIDE.
- C. TWO (2) MICRO PIONEERS MOUNTED TO THE BOTTOM OF THE ARROW BOARD BRACKET.
- D. TWO (2) M6BTTD STOP, TAIL, AND TURN WITH BRUSH GUARDS MOUNTED TO THE BACK SIDE OF THE ARROW BOARD BRACKET.
- E. TWO (2) M6AD AMBER WARNING WITH BRUSH GUARDS MOUNTED TO THE REAR OF THE BODY.
- F. TWO (2) M6BUD BACK UP WITH BRUSH GUARDS MOUNTED TO THE REAR OF THE BODY.
- G. TWO (2) M6BTTD STOP, TAIL, AND TURN WITH BRUSH GUARDS MOUNTED TO THE REAR OF THE BODY.
- H. TWO (2) MICRO PIONEERS MOUNTED BELOW THE BODY BEHIND THE MUD FLAPS ON INDIVIDUAL SWITCHES.

REFERENCE A: R-10 LIGHT BAR

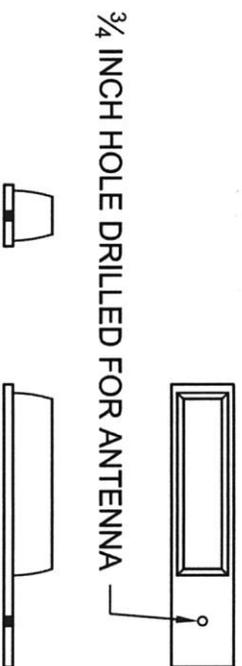

PA DEPARTMENT OF TRANSPORTATION


REVISIONS		WRECKER WITH ARROW BOARD	
NO.	DATE	BY	
1			
2			
3			

DESIGNED BY	JJB	SCALE	N/A	EQN-139
DATE	05-26-16	CHANGED BY		SHEET 1 OF 2


ARROW BOARD MOUNTING SYSTEM SHOWN IS FOR REFERENCE PURPOSES ONLY.
 ACTUAL MESSAGE BOARD MOUNTING SYSTEM SHALL BE DESIGNED TO NOT INTERFERE WITH BEACON LIGHTS, ANTENNA, OR CAB OF TRUCK. MOUNTING SYSTEM MAY BE INCORPORATED INTO PYLON.

- LIGHTING NOTES:**
 A. TWO (2) LINZ 6 WARNING LIGHTS. GROMMET MOUNTED TO THE FRONT GRILLE.

FRONT OF TRUCK

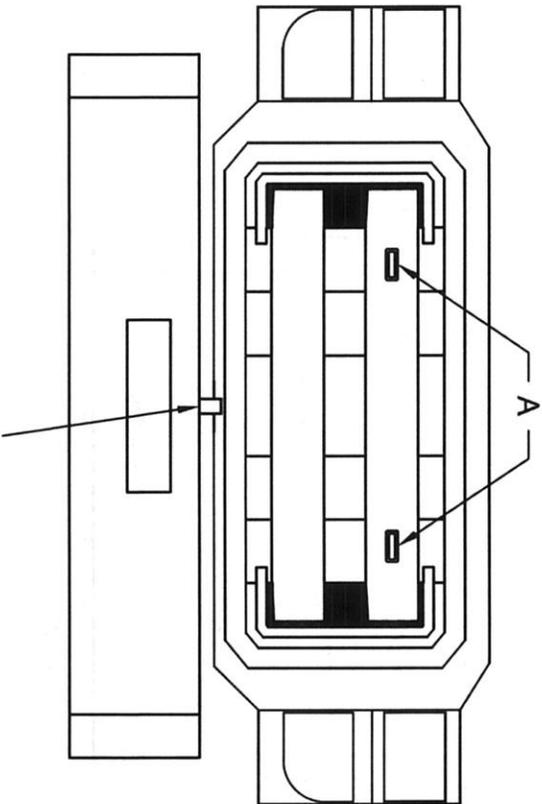

BRACKET AND POWER CONNECTOR FOR PIONEER FLOOD LIGHT SHALL BE MOUNTED ON FRONT PUSH BAR

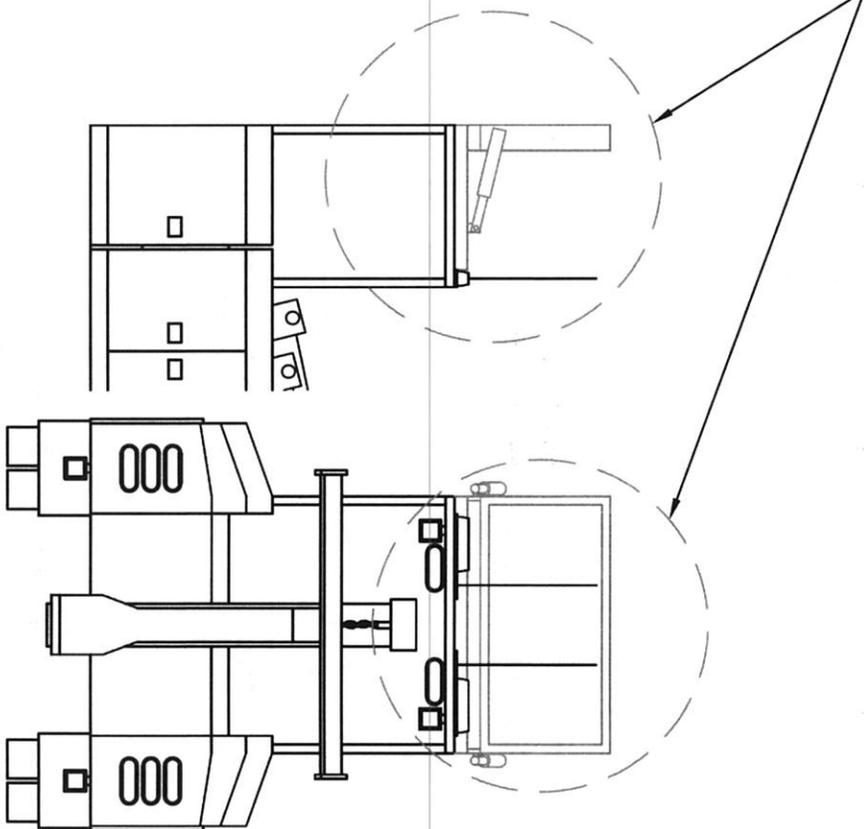

CHASSIS SHALL BE DESIGNED WITH ADEQUATE SPACE FOR USE OF TIRE CHAINS.

PA DEPARTMENT OF TRANSPORTATION

WRECKER WITH ARROW BOARD

REVISIONS			WRECKER WITH ARROW BOARD		
NO	DATE	BY	DRAWN BY	SCALE	EQN-139
1			JJB	N/A	
2					
3					

DATE 05-26-16 SHEET 2 OF 2