
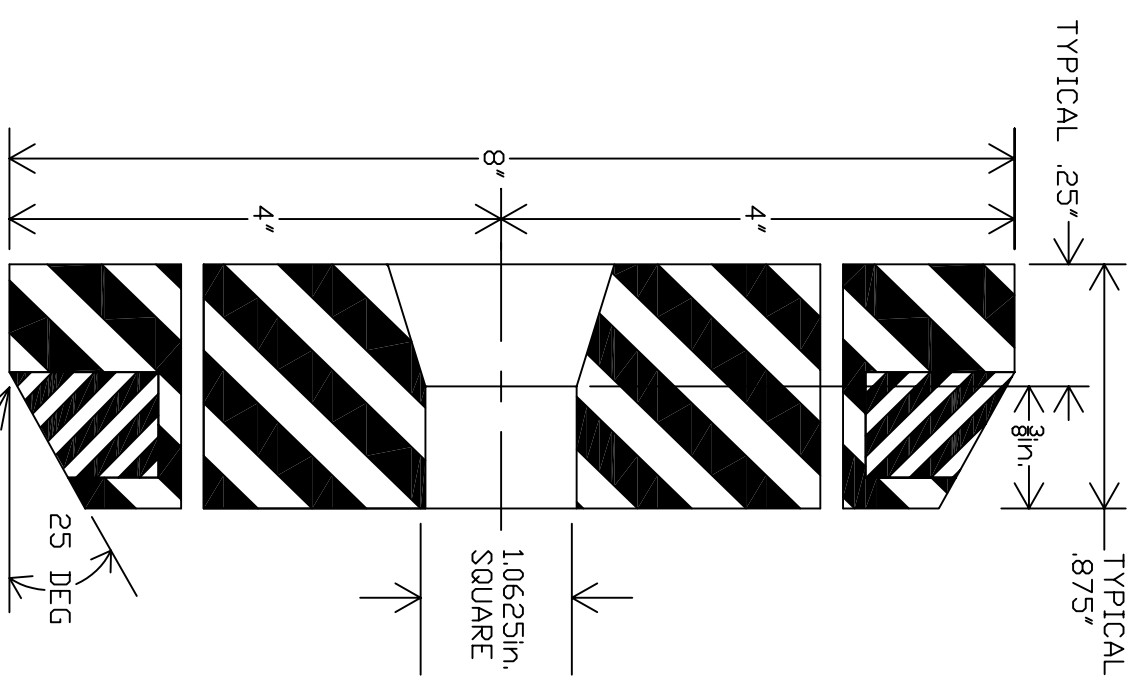


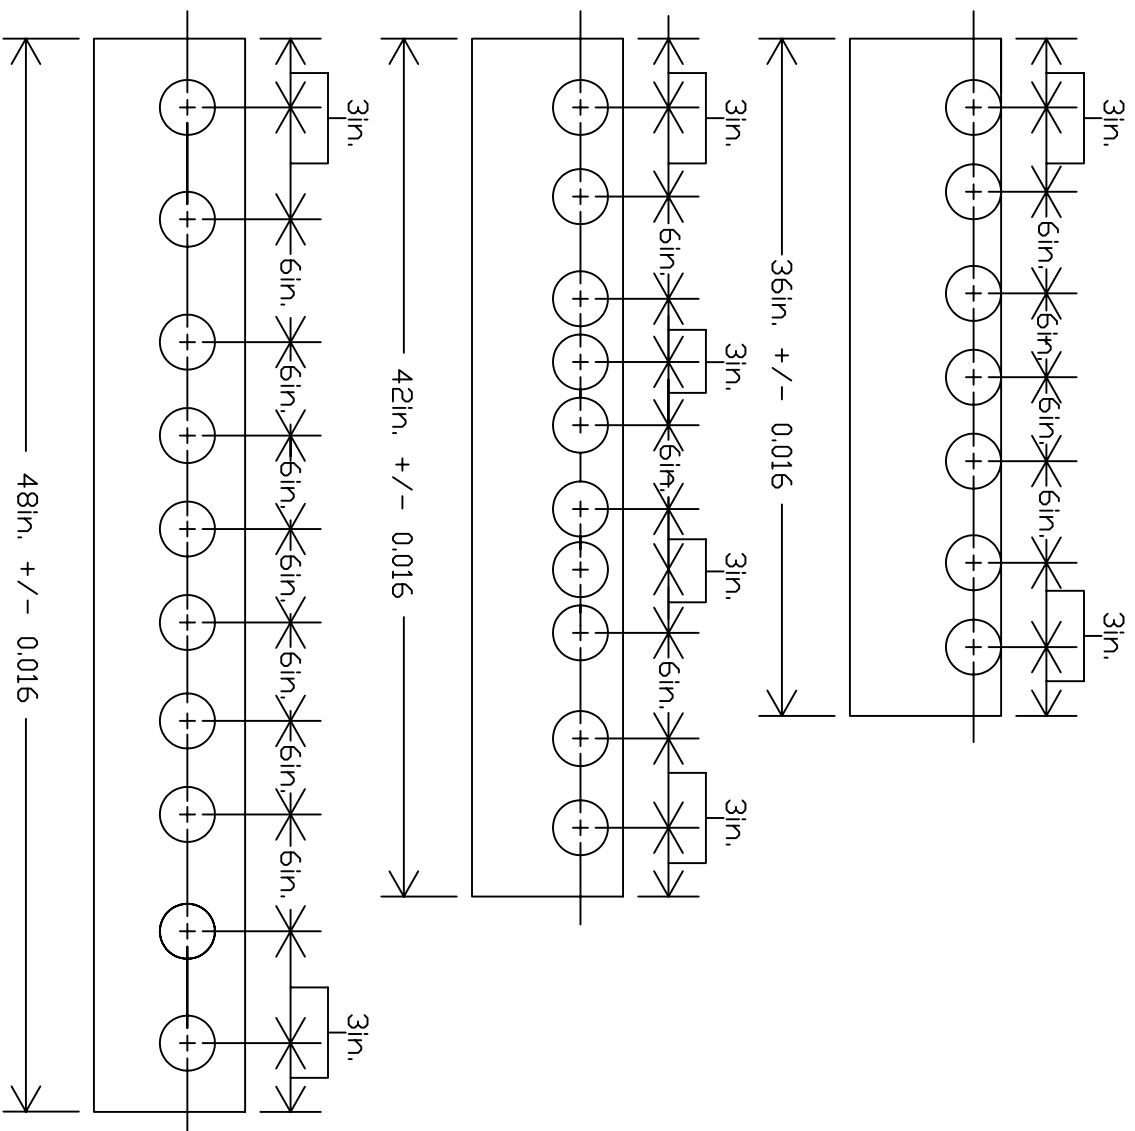

BLADE + INSERT SPECIFICATIONS SHOWN ON SEPARATE SHEET DATED APRIL 13, 1988. PROVIDED ADDITIONAL MANUFACTURING INFORMATION.
CAUTION: NOTE PUNCHING ON 42" BLADE

- NOTES:
1. MATERIAL: CARBON STEEL SAE C. 1040
 2. TO BE COMPATIBLE WITH PADDT SNOW PLOW'S
 3. ORDER TO BE COMPLETED AFTER ACCEPTANCE OF PIOLET MODEL
 4. EACH BLADE SECTION SHALL BE PUNCHED WITH MANUFACTURERS NAME AND DATE OF MANUFACTURE. (FOR PURPOSE OF RECALL).

PA DEPARTMENT OF TRANSPORTATION				
REVISIONS			SNOW PLOW	
NO.	DATE	BY	DOUBLE CARBIDE, .875"x8" BLADES	SCALE
1	05-31-01	JLB	VAA	N/A
2	03-30-07	CJW	DATE 03/12/84	CHK'D BY
SHEET 1 OF 1				EQN-17C

TUNGSTEN CARBIDE INSERTS MUST BE CENTERED IN THE BLADE EDGE.
0.0625in. RADIUS (MIN.)
25 DEG

1.0625in. SQUARE

TYPICAL .25" TYPICAL .875"